



Energy measuring

MULTICAL® 303 functions as follows:

The flow sensor registers the amount of water circulating through the system in m³ (cubic metres).

The temperature sensors placed in inlet and outlet pipes register the difference temperature, i.e. the difference between inlet and outlet temperatures.


MULTICAL® 303 calculates consumed energy based on the volume of water and the differential temperature.

Readings in the display

The display is activated by pressing the front key. Then, press the key to change to another display.

Four minutes after the latest activation of the front key, the display automatically reverts to consumed energy.

Display readings

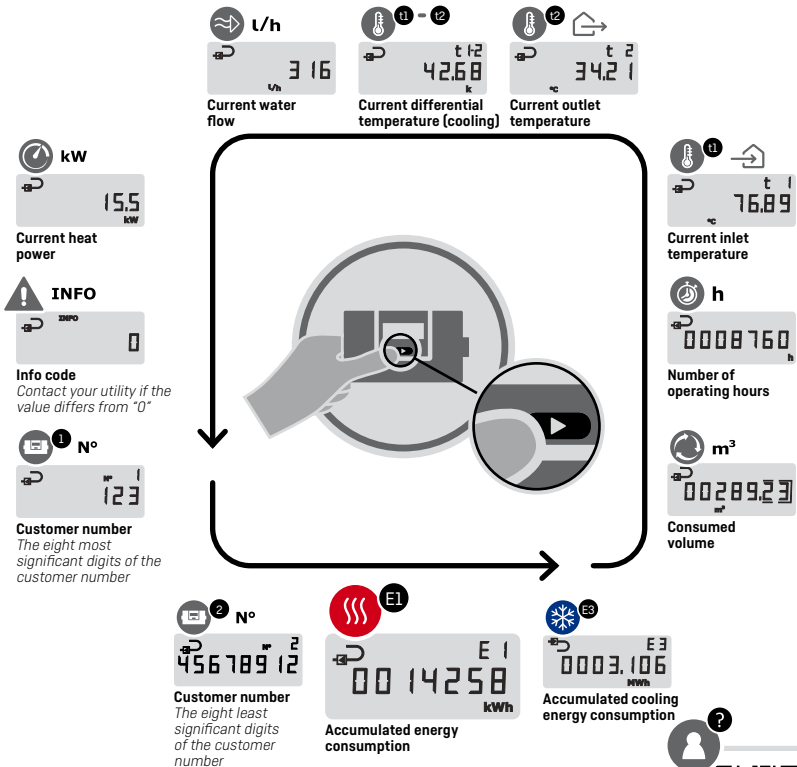

DDD=310

Moreover, see the interactive user guides at products.kamstrup.com.